

## Product datasheet

APX-50-WH

**LED flood light 50 W | 6000 K**

- Indoor and outdoor lighting
- Wide beam angle
- Without flickering
- Usable in all weather conditions



## General information

• Model	APX-50-WH
• LED chip	EPISTAR
• Body material	Aluminium
• Environment	Indoor and outdoor lighting
• Product color	White
• Operating Temperature	from - 40 °C to + 50 °C
• Mounting	Surface mounting
• IP Protection Rate	IP65
• Weight	0,620 kg


## Electrical Specifications

• Power Consumption	50 W
• Input Voltage	AC 85 - 265 V / 50 - 60 Hz
• Dimmable Function	No
• Replacing LED	No
• Replacing Power Supply	No

## Lighting Specifications

• Luminous flux	4500 lm
• Luminous efficiency	90 lm / W
• Color of the light	Cold White
• CCT	6000 K
• Color Render Index (CRI)	≥ 80
• Beam Angle	120 °
• Unified Glare Rating (UGR)	≤19
• Life Span	30 000 working hours

## Photometric Diagram

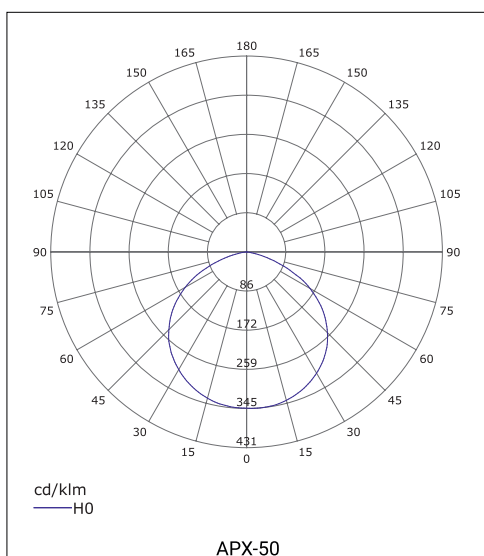

## Packing Information

- Package dimensions 220 x 165 x 48 mm
- Gross Weight 0,680 kg
- Transport package 10 pieces

## Dimensions

